

Handheld unmanned aerial vehicle reconnaissance and strike integrated equipment

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: MYT
- Model Number: DR300-1
- Minimum Order Quantity: 1 unit
- Packaging Details: 75cm*41cm*22cm 11KG
- Delivery Time: 10 work days
- Payment Terms: L/C, T/T
- Supply Ability: 1000units per month



Product Specification

- Highlight: handheld anti drone gun


Product Description

Handheld unmanned aerial vehicle reconnaissance and strike integrated equipment

Specification

Place of Origin	Jiangxi, China
Brand Name	MYT
Weight	≤7kg
Size	LWH (770mm80mm284mm)±5mm
Overall power consumption	≤25W (in detection mode)
Power consumption	≤320W (under the countermeasure mode)
External power supply voltage	100~220V AC
Counteracting response time	≤6s
Production plan	OEM/ODM



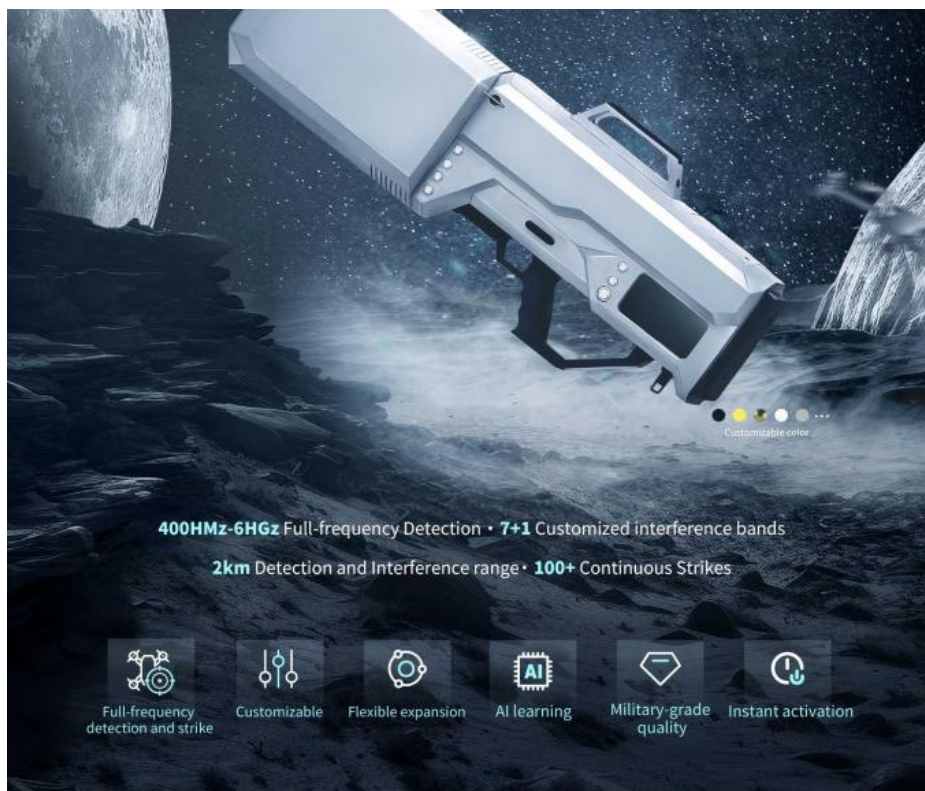

400MHz-6GHz Full-frequency Detection • **7+1** Customized interference bands
2km Detection and Interference range • **100+** Continuous Strikes



Product Highlights

- **Special unmanned aerial vehicle interference**
With the latest DDS core algorithm, to achieve strong interference with FHSS and FPV drones
- **Personalized custom frequency bands**
7 common frequency bands + 5 expandable frequency bands, covering the 400MHz-5.8GHz frequency
- **Diversified equipment expansion**
The external rail can be equipped with devices such as sight, navigation deception and pilot positioning, etc.
- **Humanized appearance design**
Supports both fixed and handheld forms, easy to operate, and one-touch activation
- **AI autonomous learning**
Can be equipped with UAV signal acquisition modules for expanding the aircraft type library
- **Reliable military-grade quality**
Full-body aerospace aluminum shell, suitable for various environments(-40°C to +60°C)
- **Professional after-sales service**
Lifetime free upgrades to the aircraft type library, supports customization, 24/7 online service



Performance Indicators

Detection bands	400-1500MHz, 2200-2500MHz, 5100-5900MHz
Detection range	≥ 2km(depending on conditions)
Detection response time	< 2s
Countermeasure bands	800 MHz, 900MHz, 1.2GHz, 1.5GHz, 2.4GHz, 5.2GHz, 5.8GHz
Expandable bands	433MHz, 700MHz, 1.4 GHz etc.
Countermeasure range	≥ 2km (depending on conditions)
Standby time	≥ 24h
Operating temperature	-40°C +60°C
Networking methods	SIM card, eSIM
Alarm methods	Sound and indicator light
Battery	Built-in low-temperature resistant battery, standard with 2 units
Weight	≤ 7kg(including battery)
Dimensions	770mm80mm284mm (LWH)
Display	LCD screen for viewing device status



Chongqing Miao Yi Tang Technology Co., Ltd.



+8613101235550



gary@chinaantidrone.com



chinaantidrone.com

www.chinaantidrone.com