

Anti FPV 8 Band To 12 Band 1KM-2KM Jamming Device

Basic Information

Place of Origin: ChinaBrand Name: MYT

Model Number: DR100-C8 C12

Minimum Order Quantity:

• Price: Negotiable on Quantity

Delivery Time: 10 work days

Payment Terms: T/T

• Supply Ability: 1000units per month



Product Specification

Storage Temperature: -60°-150°
 Weight: ≤40KG
 Power Consumprion: ≤50W

• Size: 700mm*400mm(Radius*Height)

• Interference Range: 1KM-2KM

• Operating Frequency: 400M-500MHz, 630M-780MHz, 770M-

900MHz, 890M-1020MHz,1220M-1360MHz,

• Highlight: fpv anti uav jammer, fpv anti drone jammer,

1km anti uav jammer



More Images





Anti FPV 8 Band To 12 Band 1KM-2KM Jamming Device

1, Product Introduction

DR100-C8 C12 Vehicle-mounted FPV drone defense equipment is specially designed to deal with the threat of drones (especially FPV drones, first-person perspective drones). By generating interference signals, preventing communication between the drone and the remote controller, or interfering with the drone's navigation signal. The equipment is highly mobile and flexible and can be quickly deployed to designated areas to interfere with and control drones.




DEVICE FEATURES

- FPV interference: Effectively defends against radio-controlled and FPV drones, with outstanding interference performance.
- Comprehensive FPV model coverage: Covers 8 frequency bands, achieving full coverage of FPV drone frequencies.
- Multiple working modes: Supports both fixed and vehicle-mounted modes, offering manual and autonomous control of interference bands.

- Easy to operate:
 - One-click full-frequency interference or independent control of interference bands.
- Strong expandability: Flexibly deployable on various vehicles, expandable to integrate radar, electro-optical systems, and navigation deception devices.
- Customized service: Tailored intelligent solutions are provided based on customer needs for optimal defense performance.
- Military-grade quality: Built with high-transparency materials and aviation aluminum structure, it withstands extreme temperatures from -40°C to +60°C.

DEVICE PARAMETERS

	400MHz-500MHz、630MHz-780MHz、770MHz-900MHz、	
Interference Frequency	890MHz-1020MHz、1220MHz-1360MHz、2400MHz-2500MHz、	
	5100MHz-5300MHz、5700MHz-5900MHz (customizable)	
Band Power	Each band ≥30W	
Countermeasure Range	0-1km (depending on conditions)	
Interference Direction	360°	
Response Time	≤5 seconds	
Power Supply	AC220V/110V	
Power Consumption	≤1000W	
Control Method	Handle control or software control	
Operating Temperature	-40°C-+60°C	
Dimensions	30-40kg	
Weight	700mm*400mm (Radius*Height)	

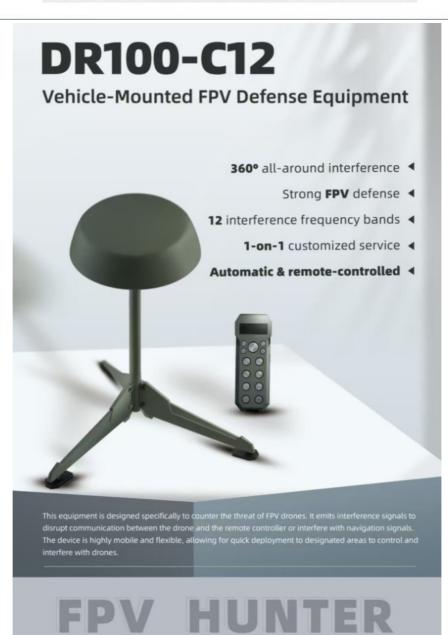

DEVICE FEATURES

interference performance.

Comprehensive FPV model coverage: Covers 12 frequency bands, achieving full coverage of FPV

Multiple working modes: Supports both fixed and vehicle-mounted modes, offering manual and autonomous control of interference bands.

& Easy to operate:

One-click full-frequency interference or independent control of interference bands.


Strong expandability: Flexibly deployable on various vehicles, expandable to integrate radar, electro-optical systems, and navigation deception devices.

Customized service: Tailored intelligent solutions are provided based on customer needs for optimal defense performance.


Military-grade quality: Built with high-transparency materials and aviation aluminum structure, it with stands extreme temperatures from -40°C to +60°C.

DEVICE PARAMETERS

	220-300MHz, 300-400MHz, 400-500MHz, 500-620MHz, 620-780MHz	
Interference Frequency	740-880MHz, 860-1020MHz, 1080-1220MHz, 1220-1360MHz,	
	2400-2500MHz, 5100-5300MHz, 5680-5900MHz (customizable)	
Band Power	Each band ≥30W	
Countermeasure Range	0-1km (depending on conditions)	
Interference Direction	360°	
Response Time	≤5 seconds	
Power Supply	AC220V/110V	
Power Consumption	≤1000W	
Control Method	Handle control or software control	
Operating Temperature	-40°C-+60°C	
Dimensions	30-40kg	
Weight	700mm*400mm (Radius*Height)	

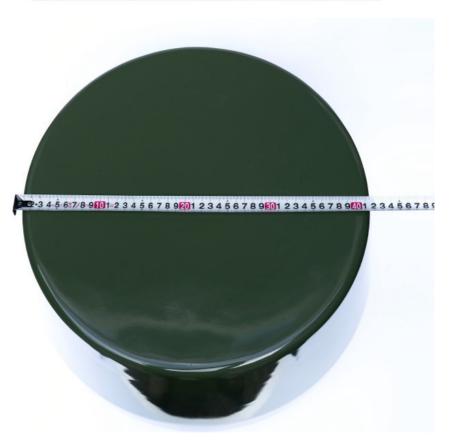



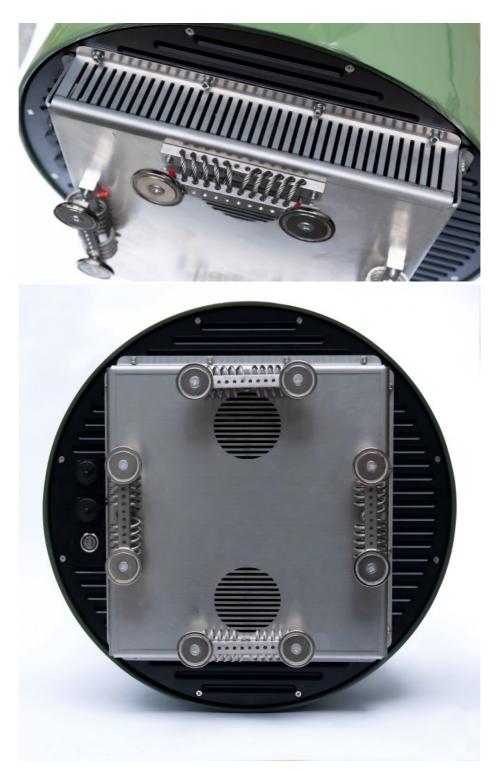


2, Specification

Place of OriginChinaProduct nameVehicle-mounted FPV Defense Equipment Rf DR100-C8Action ObjectDrone Map Transmission, Flight Control LinkOperating Frequency400M-500MHz, 630M-780MHz, 770M-900MHz, 890M-1020MHz,1220M-1360MHz, Interference Range1KM-2KMPower Consumprion≤50WWeight≤40KGProtection LevelIP65Storage Temperature-60°-150°Dimensions700mm*400mm(Radius*Height)

3, Product Internal Structure



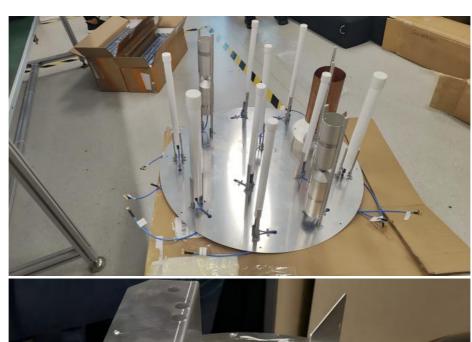



4, After-Sales service

- 1. We offer 24 hours service after sales
 2. If there are any usage or quality issues with the product, we provide online technical support to diagnose the cause of the problem.
 3. Should you find the products unsatisfactory, kindly return it to us within a period of 3 months from the date of dispatch. Upon receipt and inspection, should the products be found to be free from any damage attributable to human factors, a full refund will be granted. Alternatively, we can engage in discussions to amend the product and subsequently reship the product to you.

 This PI is applicable to the DDP shipping agreement.


Afreican Parks Counter-UAV Strategic Partnership








Procurement Officer/Po	Finance Manager/Controller Virgile HOUNGBEDJI	
Chantal KABIBAHOU		
170	17	

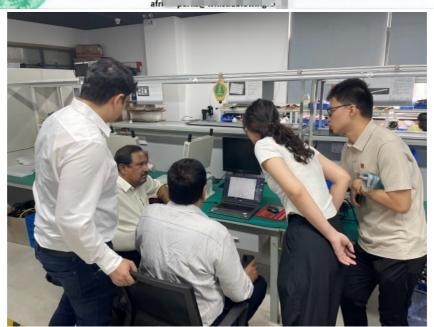





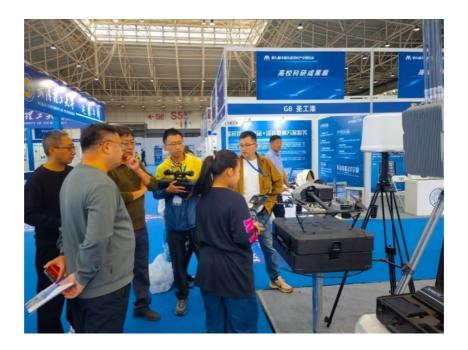

6, Certification Certificate

The product has obtained dual certification from the Ministry of Public Security and the National Security Center, and is capable of adapting to various severe incidents, possessing military-grade quality.

























7, Paking and Delivery

Supports various logistics methods including shipping, air freight, water transport, and express delivery, covering logistics in





Chongqing Miao Yi Tang Technology Co., Ltd.



+8613101235550



gary@chinaantidrone.com



chinaantidrone.com

www.chinaantidrone.com