# Handheld Drone Signal Alarm And Frequency Data Transportation

### **Basic Information**

Place of Origin: China
Brand Name: MYT
Model Number: DR400-B
Minimum Order Quantity: 1

• Price: Negotiable on Quantity

• Delivery Time: 10 work days

• Payment Terms: T/T

• Supply Ability: 1000units per month



# **Product Specification**

Weight: 183g
Communication Distance: 1KM+
Size: 199\*75\*40mm
Power Supply: Removable Li Battery
Detection Range: 1.5KM-3KM

• Highlight: Handheld Cell Phone Signal Jammer,

Hidden 4 Antennas Phone Signal Jammer

Cell Phone Signal Jammer



# More Images











# **Product Description**

# Handheld Drone Signal Alarm And Frequency Data Transportation

### 1, Product Introduction


The Portable Drone Detection System, comprising a detection master device and a wristband information receiving terminal, integrates spectrum sensing technology and offers capabilities in reconnaissance, display control, and team coordination. It is an effective device for detecting, identifying, and signaling alarms for various types of drones. The product utilizes low-power ultra-wideband digital receiving technology, signal detection algorithms, and drone




identification algorithms, coupled with an external high-efficiency ultra-wideband antenna. It can accurately identify drones such as quadcopters, fixed-wing, DIY, and FPV in complexelectromagnetic environments and triggers auditory, visual, and vibration alarms.

The equipment consists of a main detection unit and several data terminals. The DR400E data terminal is presented in the form of an electronic tablet, with a transmission distance of over 1 kilometer.



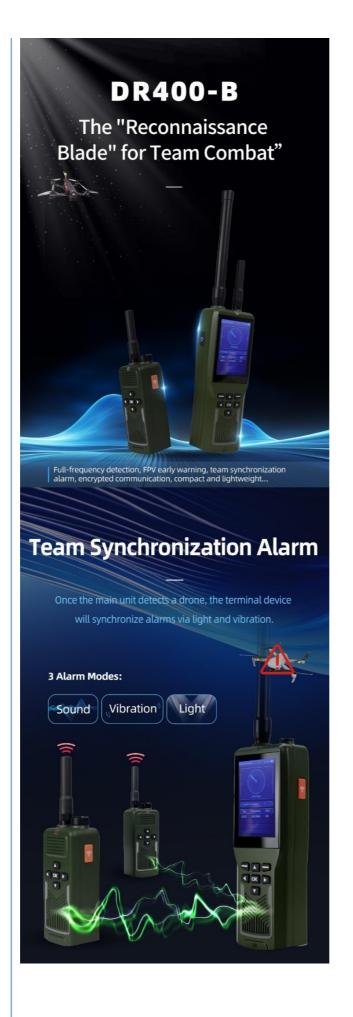



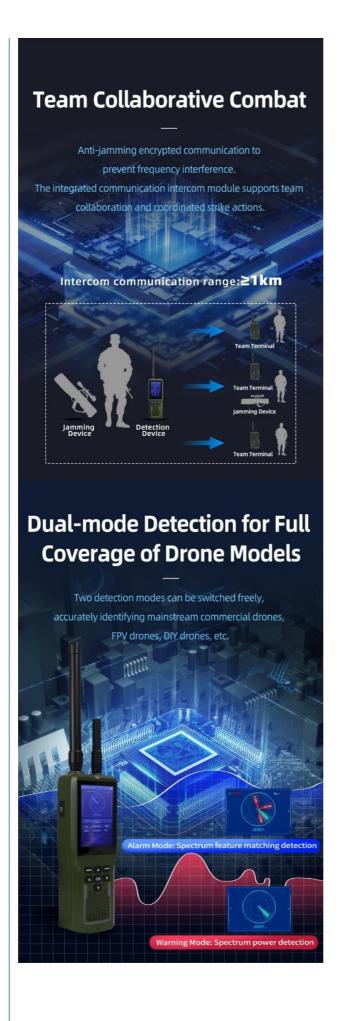



### Test Objective:

To verify if the equipment has a drone detection range of over 3KM.

Principle of the Device:The device detects the video transmission signals emitted by drones. TIPS:The video transmission (VT) signal is emitted by the drone, and the drone controller serves as the receiving unit for the VT signal. To verify the authenticity of the video, it is necessary to place both the handheld detection device and the remote controller in the same video. The detected frequency range in the video is 5700MHz-5850MHz, which is a standard VT signal frequency band. Therefore, the drone controller does not emit signals.

#### ••

### 2, Specification

Idengtification Type	Most mainstream brand drones and FPV drones	
Detection Frequency	Supports 400MHz-6GHz customized scanning,by default 400MHz,800MHz,900MHz,1.2GHz,1.4GHz,2.4 GHz,5.2GHz,5.8GHz	
Detection Range	ЗКМ	
Detection Response Time	≤3\$	
Detection Principle	Spectrum feature identfication	
Alarm method	Audio,vibration,light	
Coummunication Distance	1KM +	
Intercom Distance	3KM(open and unobstructed)	
Battery life	Main device≥8 hours,auxiliary device≥12	
	hours	
Working temperature	-20 ~+50	

# 3, Business Partner

Afreican Parks Counter-UAV Strategic Partnership






Park Manager or Delegated Manager	Procurement Officer/Po	Finance Manager/Controller
Habteyesus Mathewos TADESSE	Chantal KABIBAHOU	Virgile HOUNGBEDJI
A Harore	Helo	17
Suspicious behavior? Send an anonymo	us message t	







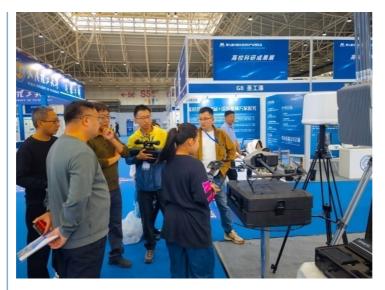

#### 4, After-Sales service

- 1. We offer 24 hours service after sales
- 2. If there are any usage or quality issues with the product, we provide online technical support to diagnose the cause of the problem.

  3. Should you find the products unsatisfactory, kindly return it to us within a period of 3 months from the date of dispatch. Upon receipt and inspection, should the products be found to be free from any damage attributable to human factors, a full refund will be granted. Alternatively, we can engage in discussions to amend the product and subsequently reship the product to you.



#### 6, Paking and Delivery

Supports various logistics methods including shipping, air freight, water transport, and express delivery, covering logistics in 90% of the global regions.





# Chongqing Miao Yi Tang Technology Co., Ltd.







chinaantidrone.com

www.chinaantidrone.com