



# **Basic Information**

Place of Origin: China
Brand Name: MYT
Model Number: PMJ8
Minimum Order Quantity: 1

Price: Negotiable Delivery Time: 5 work days

Payment Terms: T/T

• Supply Ability: 10000 units per month



# **Product Specification**

• Detection Range: 3KM

Detection Principle: Spectrum Feature Identification

• Idengtification Type: Most Mainstream Brand Drones And FPV

Drones

• Intercom Distance: 3KM open And Unobstructed

• Detection Frequency: Supports 400MHz-6GHz Customized

Scanning by Default

400MHz 800MHz 900MHz 1.2GHz 1.4GHz 2.

Detection Response Time: ≤3S

Alarm Method: Audio vibration light

• Working Temperature: -20 ~+50

Battery Life: Main Device≥8 Hours auxiliary Device≥12

Hours

Endurance Time: 6hours
Data Transportation: 1KM+
Power Supply: Battery



# More Images







## Anti Drone Radio Detection handled Device Long Range Detector

#### 1, Product Introduction


The equipment has two scanning modes: full-band scanning and key-band scanning. It possesses the most comprehensive database of drone models and their usage frequencies, enabling accurate identification of drone models.

It can achieve an extremely low false alarm rate in complex electromagnetic environments and can accurately identify quadcopter, fixed wing, DIY drones, FPV drone etc., and generate sound, light and vibration alarms.


The device has a LoRa interface, which can transmit detected drone data to other devices through a LoRa module, facilitating coordination with other anti-drone equipment.







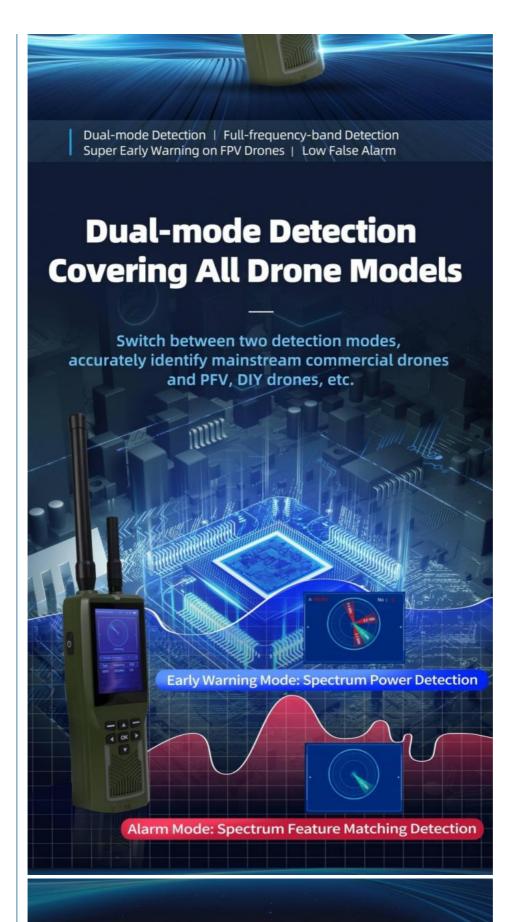

70MHz-6.2GHz
Full-frequency-band
Customized Scanning
and Detection

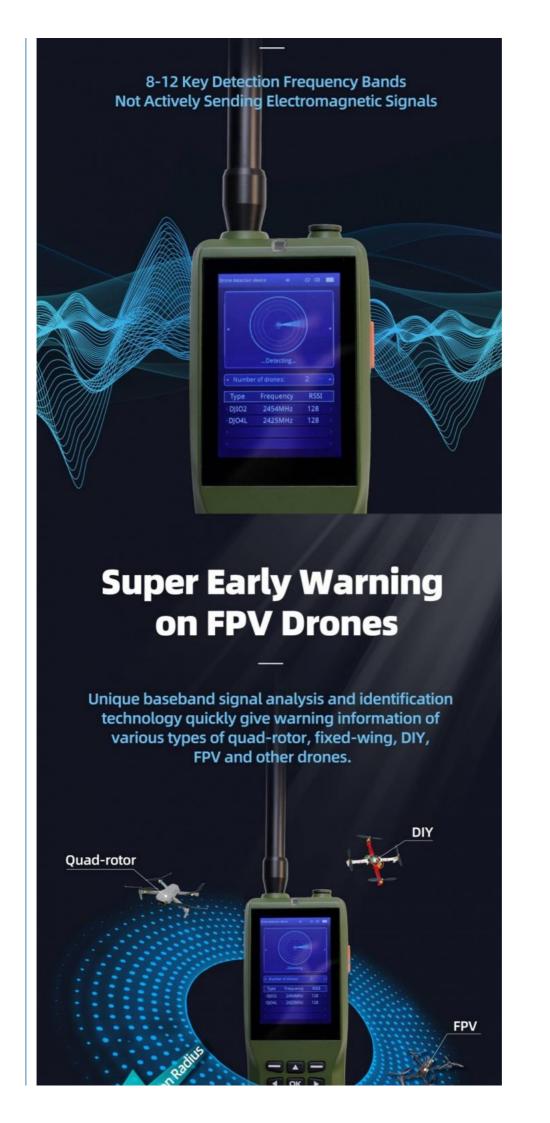

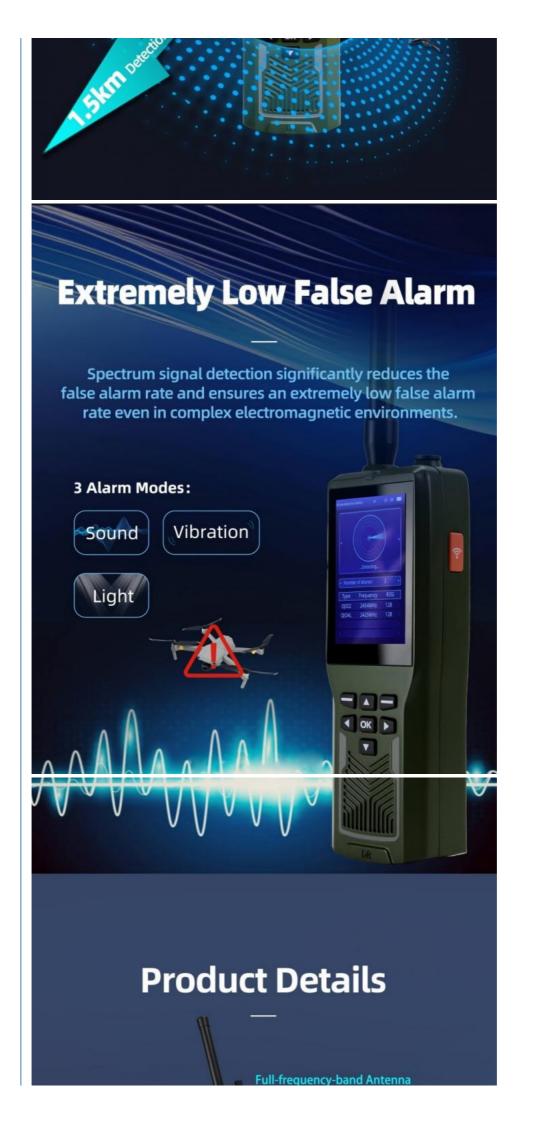

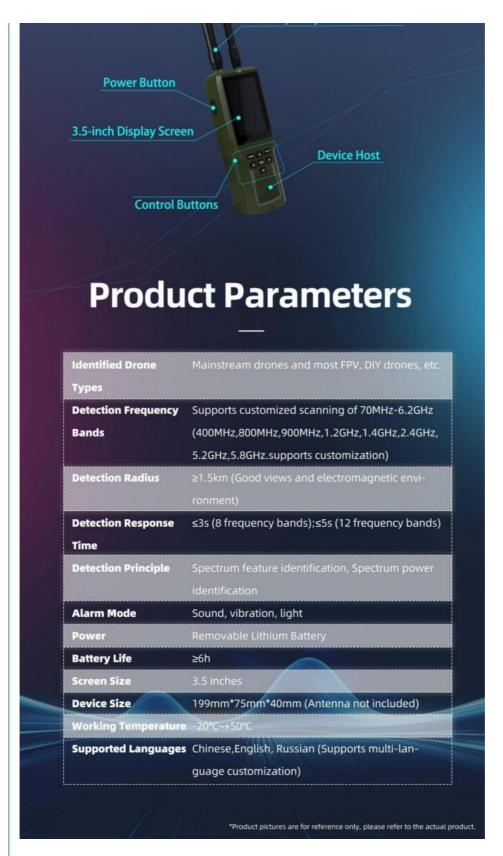

Test Objective: To verify if the equipment has a drone detection range of over 3KM.Principle of the Device: The device detects the video transmission signals emitted by drones.

TIPS:The video transmission (VT) signal is emitted by the drone, and the drone controller serves as the receiving unit for the VT signal. To verify the authenticity of the video, it is necessary to place both the handheld detection device and the remote controller in the same video. The detected frequency range in the video is 5700MHz-5800MHz, which is a standard VT signal frequency band. Therefore, the drone controller does not emit signals.

#### 2. Feature

drones, etc.

- \* Wide coverage of detection frequency bands: Full coverage of mainstream frequency bands 70MHz-6.2GHz, 8-12 key detection frequency bands;
- \* Super FPV early warning: Unique baseband signal analysis and identification technology, rapid early warning for all types of DIY and FPV drones;
- \* Low false alarm rate: Spectrum signal detection can reduce the false alarm rate and achieve extremely low false alarm rate in complex electromagnetic environments;



# 3, Specification

Display Show Content	
Shows that the device is in detection status	Detection signal type
The icon is displayed when the red light alarm function	Detection signal frequency
is turned on, and the icon is not displayed when turned	
off.	
The icon is displayed when the frequency sweep	Detection signal strength
function is turned on, and the icon is not displayed	
when turned off.	
The icon is displayed when the vibration alarm function	The icon is displayed when the sound alarm function is
is turned on, and the icon is not displayed when turned	turned on, and the icon is not displayed when turned
off.	off.

Idengtification Type	Most mainstream brand drones and FPV drones
Detection Frequency	Supports 400MHz-6GHz customized scanning,by
	default
	400MHz,800MHz,900MHz,1.2GHz,1.4GHz,2.4GHz,5.2
	GHz,5.8GHz
Detection Range	≥2KM
Detection Response Time	≤3\$
Detection Principle	Spectrum feature identfication
Alarm method	Audio,vibration,light
Intercom Distance	3KM(open and unobstructed)
Battery life	Main device≥8 hours,auxiliary device≥12 hours
Working temperature	-20 ~+50



#### 4, After-Sales service

- 1. We offer 24 hours service after sales
- 2. If there are any usage or quality issues with the product, we provide online technical support to diagnose the cause of the problem.

  3. Should you find the products unsatisfactory, kindly return it to us within a period of 3 months from the date of dispatch. Upon receipt and inspection, should the products be found to be free from any damage attributable to human factors, a full refund will be granted. Alternatively, we can engage in discussions to amend the product and subsequently reship the product to you.

### 5, Buesiness Partner

Afreican Parks Counter-UAV Strategic Partnership







Park Manager or Delegated Manager	Procurement Officer/Po	Finance Manager/Controller
Habteyesus Mathewos TADESSE	Chantal KABIBAHOU	Virgile HOUNGBEDJI
A Harbre.	Har	17









### 6, Certification Certificate























#### 7, Company profile

Chongqing Miao Yitang Technology Co., Ltd. is a specialized company engaged in anti-drone and unmanned intelligent defense management. With the technical support from the Al Internet of Things Research Institute of the Chinese Academy of Sciences and collaborations with multiple intelligent Al companies, the company has established research laboratories for Al unmanned field products, accumulating a variety of technical patents.

The company's products are widely applied to unmanned automatic management solutions for various defense and perimeter areas, including Al anti-drone systems and Al unmanned vehicle patrol systems. These systems integrate with multiple technologies such as optoelectronics, radar, vibration, thermal imaging, facial recognition, and radio frequency management, truly achieving a 24-hour uninterrupted anti-drone defense and ground perimeter defense warning system. This allows for cost savings for clients, reduction in human resource allocation, and ensures the safety of clients' lives and property. The outstanding security system has won the company an excellent reputation and created higher value for its partners.







### 8, Paking and Delivery





Chongqing Miao Yi Tang Technology Co., Ltd.



+8613101235550





chinaantidrone.com

www.chinaantidrone.com