

Cutting-Edge Anti UAV Radar With Machine Learning And Al Recognition Techniques For Precise Target Tracking

Basic Information

Place of Origin: ChinaBrand Name: MYT

Certification: CNAS、CMA、CAL、ILAC-MRA

Model Number: DD-R22 Minimum Order Quantity: 1

• Price: Pricing is negotiable based on order quantity

Delivery Time: 10 work daysPayment Terms: L/C,T/T

Supply Ability: 1000units per month



Product Specification

Detection Range: ≥5Km RCS:0.01m2 Unmanned Aerial

Vehicle 3 Fade Zone

Fade Zone: ≤150mTAS Tracking Target Count:≥6

• Size: ≤575mm*317mm*220mm

Minimum Detection Altitude:≤10m

• Velocity Range: 1m/s~100m/s

Resolution Ratio: Distance: ≤15m, Azimuth: ≤6°, Elevation: ≤4°

• Operating Temperature -40

Range:

-40 +70

• Power Dissipation: ≤350W

Supply Electricity: AC220V/DC24V

Highlight: Anti UAV radar with Al recognition,

Machine learning drone detection radar, Precision target tracking UAV radar

DD-R22 Ku-band medium-range phased array radar

1, Product Overview

The DD - R22 Ku - band medium - range phased array radar is a highly sophisticated system. It employs a fully solid - state, fully coherent, and pulse Doppler configuration. This configuration enables it to perform all - weather detection and early warning operations, with a particular emphasis on detecting "low, small, slow" targets.

By harnessing machine learning and artificial intelligence recognition techniques that are founded on two key elements - "track characteristics" and "micro - Doppler signatures", the system achieves an extremely low false alarm rate. This accomplishment is of great significance as it ensures a more reliable and accurate operational performance.

Moreover, this radar system is highly proficient in detecting and classifying a wide array of targets. These targets include drones, which have become increasingly common in numerous applications. Given their small size and frequently low - altitude flight, drones present unique detection challenges. Light aircraft, with dimensions relatively smaller than those of larger commercial aircraft, are also within the detection range of the radar. Helicopters, recognized for their vertical take - off and landing capabilities and distinctive flight patterns, can be precisely detected and classified. Powered triplanes, airships, and airborne balloons, each possessing their own distinct flight characteristics, are also successfully identified by the DD - R22 Ku - band medium - range phased array radar. This comprehensive target detection and classification capability renders the radar an invaluable asset in various scenarios, be it for military surveillance, border control, or civilian airspace monitoring.

2. Function

The product utilizes advanced machine learning technology. This enables it to adapt to battlefield environments and be directly deployed upon installation, eliminating the need for parameter adjustment. The system features robust detection capabilities and an extremely low false alarm rate, effectively detecting the maneuvering flights of unmanned aerial vehicles. To guarantee reliable all - weather operation, the product is equipped with cloud and rain noise suppression functionality, enabling continuous operation under diverse weather conditions.

Regarding scanning modes, the system provides two directional scanning methods: "one - dimensional mechanical scanning + one - dimensional phase scanning" and "two - dimensional phase scanning". It can achieve both 360° all - round spatial detection and precise monitoring of key areas. The two modes can be flexibly switched without the necessity of software modifications. The product concurrently integrates mechanical scanning tracking and phase scanning TAS tracking functions to ensure continuous and stable target tracking.

Al recognition technology based on "track features" empowers the system to accurately classify and identify multiple target types, including drones, birds, personnel, and vehicles. The built - in automatic positioning and calibration module can automatically perform equipment leveling and calibration functions, streamlining the operation process. Moreover, the system offers flexible setting functions for distance and elevation scanning ranges, enabling users to make personalized configurations according to actual requirements.

3, qualification

order numb er	parameter	metric
1	frequency range	Ku frequency range
2	detection range	≥5Km(RCS:0.01m ² , unmanned aerial vehicle)
3	fade zone	≤150m
4	work pattern	Machine scan and 2D phase scan
5	hunting zone	Scan: Angle: 0°~360°, Pitch: 0°~80° (configure according to task requirements)
		Sweep: Azimuth: -45° to 45°, elevation: 0° to 80° (configure according to mission requirements)
6	trace function	Machine scanning tracking function / phase scanning TAS function
7	TAS tracking	≥6
	target count	
8	Minimum detection	≤10m
	altitude	
9	velocity range	1m/s~100m/s
10	Target update rate	Scan time ≤3.5 seconds per phase (30° pitch coverage, 7.5km range)
11	resolution ratio	Distance: ≤15m, azimuth: ≤6°, elevation: ≤4°
12	Search precision (RMS)	Distance: ≤10m, azimuth: ≤0.4°, elevation: ≤0.4°
13	Tracking accuracy (RMS)	Distance: ≤10m, azimuth: ≤0.3°, elevation: ≤0.3°
14	joggle	RJ45 network port
15	target capacity	≥500 batches
16	weight	≤26kg (front panel: ≤13kg; turntable: ≤12kg)
17	supply electricity	AC220V/DC24V
18	power dissipation	≤350W
19	size	≤575mm*317mm*220mm

	20	operating temperature range	-40 +70
Ī	21	levels of protection	IP66

4, Application Scenarios



5, Certification Certificate



Chongqing Miao Yitang Technology Co., Ltd. is a specialized company engaged in anti-drone and unmanned intelligent defense management.

With the technical support from the AI Internet of Things Research Institute of the Chinese Academy of Sciences and collaborations with multiple intelligent AI companies, the company has established research laboratories for AI unmanned field products, accumulating a variety of


The company's products are widely applied to unmanned automatic management solutions for various defense and perimeter areas, including Al anti-drone systems and Al unmanned vehicle patrol systems. These systems integrate with multiple technologies such as optoelectronics, radar, vibration, thermal imaging, facial recognition, and radio frequency management, truly achieving a 24-hour uninterrupted anti-drone defense and ground perimeter defense warning system. This allows for cost savings for clients, reduction in human resource allocation, and ensures the safety of clients' lives and property. The outstanding security system has won the company an excellent reputation and created higher value for its partners.





7, Customer Service

- 1). We offer 24 hours service after sales
- 2). If there are any usage or quality issues with the product, we provide online technical support to diagnose the cause of the problem.
- 3). Should you find the products unsatisfactory, kindly return it to us within a period of 3 months from the date of dispatch. Upon receipt and inspection, should the products be found to be free from any damage attributable to human factors, a full refund will be granted. Alternatively, we can engage in discussions to amend the product and subsequently reship the product to you.

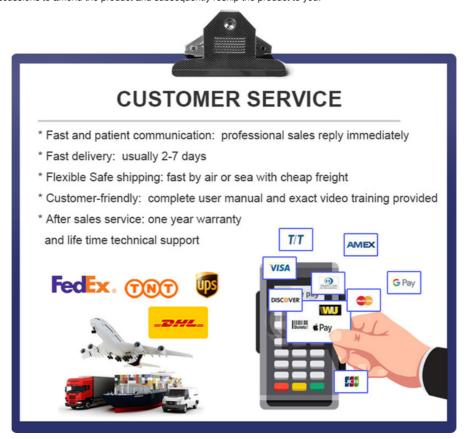



Chongqing Miao Yi Tang Technology Co., Ltd.



+8613101235550



