


Fixed Drone Detection and Defense System with 70MHz-8GHz Full Frequency Band Scanning $\geq 10\text{km}$ Detection Distance and IP66 Environmental Adaptability

Our Product Introduction

for more products please visit us on chinaantidrone.com

Basic Information

- Place of Origin: China
- Brand Name: MYT
- Certification: CNAS、CMA、CAL、ILAC-MRA
- Model Number: KZ-03P
- Minimum Order Quantity: 1
- Price: Pricing is negotiable based on order quantity
- Delivery Time: 10 work days
- Payment Terms: L/C,T/T
- Supply Ability: 1000units per month

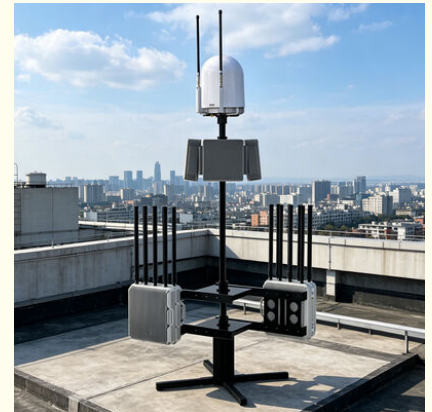


Product Specification

- Detection Frequency Bands: 70MHz-6GHz Full Frequency Band Scanning, Detection And Display
- Detection Distance: $\geq 10\text{km}$ (depends On Working Conditions)
- Detection Height: $\geq 1200\text{m}$
- Simultaneous Detection Quantity: ≥ 40 Drones
- Jamming Distance: $\geq 3\text{km}$ (depends On Working Conditions)
- Jamming Response Time: $\leq 7\text{s}$
- Spoofing Radius: 1-3km(depends On Environment And Drone Models)
- Spoofing Response Time: $\leq 4\text{s}$
- Detection Equipment Size: Diameter 400mm*height 370mm
- Device Total Weight: $\leq 150\text{kg}$
- Environmental Adaptability: Working Temperature -40 -70
- IP Class: IP66
- Highlight: Fixed drone detection system with 70MHz-8GHz



More Images



KZ-03P Fixed Drone Detection and Defense with Spoofing

1, Introduction

With the rapid advancement and widespread application of drone technology, unmanned aerial vehicles have demonstrated significant application potential across such fields as aerial photography, agricultural production, emergency rescue, and public security. Concurrently, however, they have also given rise to increasingly prominent safety risks. Incidents including illegal airspace intrusion, malicious reconnaissance, and privacy infringement occur frequently, posing severe threats to national security, public security, and personal privacy. Consequently, the research and development of efficient and sophisticated drone countermeasure technologies have become an urgent requirement for safeguarding airspace security and ensuring social stability.

2, Equipment Technical Parameters

N u m b e r	Name	Performance indicators
1	Detection frequency bands	70MHz-8GHz full frequency band scanning, detection and display
2	Key detection frequency bands	400MHz, 800MHz, 900MHz, 1.2GHz, 1.4GHz, 1.5GHz, 2.4GHz, 5.2GHz, 5.8GHz
3	Detection distance	≥10km (depends on working conditions)
4	Detection range	The horizontal detection angle can reach 360° Vertical detection range: -90° 90°
5	Detection height	≥ 1200m
6	Detection response time	The time required from when the equipment is powered on to when it discovers and reports the drone ≤ 10s
7	Direction finding accuracy	≤±3° (RMS, Under site conditions with no obvious obstructions or obvious electromagnetic interference)
8	Detection display	Drone distance, flight altitude, speed, position (including longitude and latitude, and required to be accurate to 1 meter), drone model, drone SN code, drone take-off point, drone return point, drone real-time trajectory, remote controller position (including longitude and latitude), etc.
9	Simultaneous Detection Quantity	≥ 40 drones
10	Drone Library	Covered the fullseries of DJI (Mavic, Air, Mini, Phantom, Inspire, Spark, MATRICE, Tello, Genie etc.), Autel, Hubsan, EHang, Y uneec, ZERO Tech, Keyshare, Xiaomi, PowerVisio, GDU, Walkera, Holystone, Spardar, AEE, JJRC, Syma, TTFly, Dahua Tech, Keweita(ALLTECH), MMC, Harwar, Hikvisio, C-Fly, Zero Zero, Shiji(SJRC), SYMA, Yunke, UpAirOne, UDIRC, Fima, 3DR, Parrot, etc.
11	AI self-learning	AI self-Learning Equipped with a drone signal collection module for autonomous learning and feature library definition.

1	Jamming Name	Performance indicators																										
1	Jamming distance	≥3km (depends on working conditions)																										
1	Interference azimuth	The horizontal angle can reach 360°, Pitch: -90° to +90°																										
	coverage																											
1	Jamming frequency bands	<p>Omnidirectional jamming frequency bands:</p> <table border="0"> <tr><td>420MHz-480MHz</td><td>50W</td></tr> <tr><td>650MHz-730MHz</td><td>50W</td></tr> <tr><td>740MHz-840MHz</td><td>50W</td></tr> <tr><td>860MHz-930MHz</td><td>50W</td></tr> <tr><td>1080MHz-1200MHz</td><td>50W</td></tr> <tr><td>1200MHz-1340MHz</td><td>50W</td></tr> <tr><td>1340MHz-1500MHz</td><td>50W</td></tr> <tr><td>1560MHz-1620MHz</td><td>50W</td></tr> <tr><td>4880MHz-5080MHz</td><td>50W</td></tr> <tr><td>5100MHz-5300MHz</td><td>50W</td></tr> <tr><td>5870MHz-6060MHz</td><td>50W</td></tr> <tr><td>5720MHz-5860MHz</td><td>100W</td></tr> <tr><td>2385MHz-2490MHz</td><td>100W</td></tr> </table>	420MHz-480MHz	50W	650MHz-730MHz	50W	740MHz-840MHz	50W	860MHz-930MHz	50W	1080MHz-1200MHz	50W	1200MHz-1340MHz	50W	1340MHz-1500MHz	50W	1560MHz-1620MHz	50W	4880MHz-5080MHz	50W	5100MHz-5300MHz	50W	5870MHz-6060MHz	50W	5720MHz-5860MHz	100W	2385MHz-2490MHz	100W
420MHz-480MHz	50W																											
650MHz-730MHz	50W																											
740MHz-840MHz	50W																											
860MHz-930MHz	50W																											
1080MHz-1200MHz	50W																											
1200MHz-1340MHz	50W																											
1340MHz-1500MHz	50W																											
1560MHz-1620MHz	50W																											
4880MHz-5080MHz	50W																											
5100MHz-5300MHz	50W																											
5870MHz-6060MHz	50W																											
5720MHz-5860MHz	100W																											
2385MHz-2490MHz	100W																											
1	Jamming frequency bands	<p>Directional jamming frequency bands:</p> <table border="0"> <tr><td>850MHz-950MHz</td><td>50W</td></tr> <tr><td>2385MHz-2490MHz</td><td>50W</td></tr> <tr><td>5720MHz -5860MHz</td><td>50W</td></tr> <tr><td>5100MHz-5300MHz</td><td>30W</td></tr> </table>	850MHz-950MHz	50W	2385MHz-2490MHz	50W	5720MHz -5860MHz	50W	5100MHz-5300MHz	30W																		
850MHz-950MHz	50W																											
2385MHz-2490MHz	50W																											
5720MHz -5860MHz	50W																											
5100MHz-5300MHz	30W																											
1	Jamming response time	≤7s																										
1	Spoofing signals	GPS, Beidou, GLONASS (Beidou-B1I,GPS-L1 C/A,L2,L5, GLONASS-L1,E1 can customize to choose)																										
1	Spoofing radius	1-3km(depends on environment and drone models)																										
1	Strategies	Directed expulsion, area denial, spatial spoofing, time-space spoofing																										
2	Spoofing Angle	Omnidirectional 360°																										
2	spoofing response time	≤4s																										
2	Cloud platform	<ol style="list-style-type: none"> 1. Unattended and manual control functions: The system can automatically complete drone detection, identification, alerting, localization, and mitigation. The software automatically activates jamming devices, and based on the drone's location information from monitoring devices, it provides fully automated tracking interference. 2. Blacklist and whitelist functions 3. High-definition GIS system: It presents surrounding environment information, device deployment points, and other relevant details. Log playback and statistical recording**: The system records drone intrusion logs, including information such as angle, alert time, and frequency. It allows playback of drone intrusion records and can generate statistical reports on drone intrusions. 4. Equipped with log playback and statistical records: drone intrusion log, the log displays angle, alarm time, frequency information, drone intrusion records can be played back, and drone intrusion statistical reports can be provided; 5. Positioning and automatic north calibration: The system features GPS positioning, allowing the location to be marked on a map, and it is capable of automatic north calibration. 6. It has drone signal extraction and addition functions: it can automatically collect unknown drone signals, automatically extract parameters, and add them to the drone feature library through manual confirmation; 7. It has the ability to display device offline, standby, power-off, and abnormal status. 8. It is capable of deceptively interfering with the satellite navigation coordinate information received by drones that use satellite navigation positioning, and has functions such as straight line mode and circle mode. 																										
2	Jamming device (omnidir)	Weight: single devices≤31kg																										

Number	Name (directional)*2	Performance indicators
m B é r	Jamming device (directional)*4	Size: Length 520mm*width 465mm*height 275mm
		Description: Main device and secondary device (see the logo) to achieve omnidirectional jamming
		Weight: single device≤5kg
		Size: Length320mm*width 320mm*height 110mm
		Description: Divided into four sides, four host devices in total (see the logo), to realize directional jamming in key frequency bands
25	Detection equipment weight	≤15kg
26	Detection equipment size	Diameter 400mm*height 370mm
27	Device total weight	≤150kg
28	Device total size	Diameter 1000mm*height 2400mm
29	Power Consumption and Supply	Detection work is 100W, full band jamming is 2800W, it shall be more than 24 hrs endurance with fixed power supply.
30	Environmental adaptability	Working temperature -40 -70
31	IP Class	IP66

3, Equipment Features and Functions

The fixed KZ-03P drone detection and jamming equipment consists of a drone detection system, a radio interference system and a spoofing system, which can detect, identify, interfere and spoof with drones. It can make the drone hover, make an emergency landing or return, effectively protecting the safety of low-altitude airspace and preventing the drone from entering the defense zone. It has excellent detection and defense performance, long-distance working ability, no need for personnel on duty.

- **Full frequency band detection:** 70MHz-6GHz full frequency band detection, covering all drone models.
- **Super interference with FPV drones:** Effective defense against radio frequency flight control and FPV drones, with outstanding interference effect.
- **Precision jamming:** Capable of precisely jamming a target drone from multiple drones of the same model and frequency band.
- **Strong scalability:** Expand and integrate radar, optoelectronics, navigation and deception and other equipment, support work by one equipment and by multiple equipment network .
- **Unattended:** Realize all-weather automatic and intelligent execution of preset plans. When a drone is detected, it can quickly coordinate strikes outside the defense zone.
- **Military quality:** Covered by aviation aluminum fuselage, no fear of high and low temperatures, strong environmental adaptability.
- **Signal collection:** Built-in drone signal collection function, which can collect and learn unknown signals.
- **Customized services:** Customized intelligent solutions according to needs to provide customers with better defense effects.
- **Record log/data storage:** system shall include log report consist of data related to drone detection up to 365 days.



4, Application Scenarios



5, Certification Certificate



6, Company profile

Chongqing Miao Yitang Technology Co., Ltd. is a specialized company engaged in anti-drone and unmanned intelligent defense management.

With the technical support from the AI Internet of Things Research Institute of the Chinese Academy of Sciences and collaborations with multiple intelligent AI companies, the company has established research laboratories for AI unmanned field products, accumulating a variety of technical patents.

The company's products are widely applied to unmanned automatic management solutions for various defense and perimeter areas, including AI anti-drone systems and AI unmanned vehicle patrol systems. These systems integrate with multiple technologies such as optoelectronics, radar, vibration, thermal imaging, facial recognition, and radio frequency management, truly achieving a 24-hour uninterrupted anti-drone defense and ground perimeter defense warning system. This allows for cost savings for clients, reduction in human resource allocation, and ensures the safety of clients' lives and property. The outstanding security system has won the company an excellent reputation and created higher value for its partners.



7, Customer Service

1. We offer 24 hours service after sales
2. If there are any usage or quality issues with the product, we provide online technical support to diagnose the cause of the problem.
3. Should you find the products unsatisfactory, kindly return it to us within a period of 3 months from the date of dispatch. Upon receipt and inspection, should the products be found to be free from any damage attributable to human factors, a full refund will be granted. Alternatively, we can engage in discussions to amend the product and subsequently reship the product to you.

CUSTOMER SERVICE

- * Fast and patient communication: professional sales reply immediately
- * Fast delivery: usually 2-7 days
- * Flexible Safe shipping: fast by air or sea with cheap freight
- * Customer-friendly: complete user manual and exact video training provided
- * After sales service: one year warranty and life time technical support



Chongqing Miao Yi Tang Technology Co., Ltd.

+8613101235550

gary@chinaantidrone.com

chinaantidrone.com

www.chinaantidrone.com